

# Technical data sheet

## Quick clip

Item number: 2149520



Flush-mounted clip to accept metric steel armoured pipes and heavy-duty insulating pipes, as well as Quick Pipe electrical installation pipes. Universal fastening options on walls and ceilings, both in indoor and protected outdoor areas. With slot for side alignment during mounting with wood screw or knock-in anchor. Toolless pipe mounting. Can also be arranged with OBO Multi-Quick or starQuick clip. M16 - M32 size can be screwed onto M6 thread. Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.



**PP** Polypropylene

### Master data

Item number	2149520
Type	2955 M40
Description 1	Quick clip
Manufacturer	OBO
Dimension	M40
Colour	Cream
Material	Polypropylene
Smallest sales unit	50
Unit of quantity	Piece
Weight	0.835 kg
Weight unit	kg/100 pc.


# Technical data sheet

## Quick clip

Item number: 2149520



### Dimensions

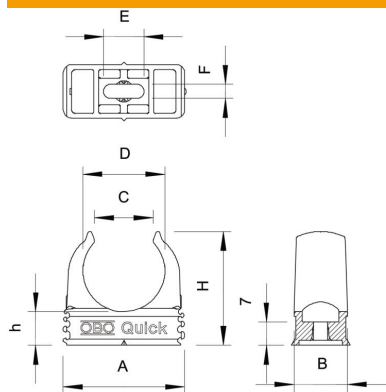

Dimension A	57.3 mm
Dimension B	16 mm
Dimension C	26 mm
Dimension D	39.2 mm
Dimension E	11 mm
Dimension F	4.6 mm
Dimension h	12 mm
Dimension H	51 mm

### Technical data

Expandable	yes
Number of cables/pipes	1
Pull-out value	110 N
Fastening type	Screw hole
Breaking load	0.14 kN
Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C
Closed	no
Halogen-free	yes
With inlay	no
Nominal size/text	M40
Quick clip installation	Durchgangsloch,_auf_M6_Gewinde_aufschraubbar
Clamping range D, max.	40 mm
Clamping range D, min.	40 mm
UV-resistant	no