

# DATASHEET

## Variable Speed Drives



### Main Features

Reference	: CFW500F77P0T4DB20C3H00G2
Product code	: 15734059
Product reference	: CFW500 G2
Accessory module (control)	: Without plug-in

### Basic data

Power supply	: 380-480 V
Input minimum-maximum voltage	: 323-528 V
Number of phases	
- Input	: 3
- Output	: 3

Supply voltage range	380-480 V	
Overload cycle	Normal Overload (ND)	Heavy Overload (HD)
Rated current	77 A	61 A
Overload current for 60 sec	84,7 A	91,5 A
Overload current for 3 sec	115,5 A	122,0 A

### Maximum applicable motor:

Voltage/Frequency	Power (HP/kW) [1]	
	Normal Overload (ND)	Heavy Overload (HD)
380V / 50Hz	50 / 37	40 / 30
380V / 60Hz	50 / 37	40 / 30
400V / 50Hz	50 / 37	40 / 30
400V / 60Hz	50 / 37	40 / 30
440V / 50Hz	60 / 45	50 / 37
440V / 60Hz	60 / 45	50 / 37
460V / 60Hz	60 / 45	50 / 37
480V / 60Hz	60 / 45	50 / 37

Accessory module (control)	: Without plug-in
Dynamic braking [2]	: Standard with braking
External electronic supply 24Vcc	: Not available
Safety Stop	: Prepared to use the safety module (G2)
Internal RFI filter	: With filter (C3 category)
External RFI filter	: Not available
Link Inductor	: Yes
Memory card	: Not included in the product
USB port	: Only with plug-in
Line frequency	: 50/60Hz
Line frequency range (minimum - maximum)	: 48-62 Hz
Phase unbalance	: Less or equal to 3% of input rated line voltage
Transient voltage and overvoltage	: Category III
Single-phase input current [3]	: Not applicable
Three-phase input current [3]	: 81,6 A
Typical input power factor	: 0.83
Displacement factor	: 0.98
Rated efficiency	: ≥ 97%
Maximum connections (power up cycles - on/off) per hour	: 10 (1 each 6 minutes)
DC power supply	: Allow
Standard switching frequency	: 4 kHz
Selectable switching frequency	: 2.5 and 15 kHz
Real-time clock	: Not available
Copy Function	: Yes, by MMF or plug-in or alphanumeric HMI
Dissipated power:	

Mounting type	Overload	
	ND	HD
Surface	830 W	830 W
Flange	Not applicable	Not applicable

### Source available to the user

Output voltage	: 24 Vcc
Maximum capacity	: 150 mA

### Control/performance data

Power supply	: Switched-mode power supply
Control method - induction motor	: V/f, VVW, Sensorless, Encoder and VVW PM
Encoder interface	: Only with plug-in
Control output frequency [5]	: 0-500 Hz

### Control/performance data

Frequency resolution	: 0,015 Hz
V/F Control	
- Speed regulation	: 1% of rated speed
- Speed variation	: 1:20
VVV Control	
- Speed regulation	: 1% of rated speed
- Speed variation	: 1:30
Sensorless vector control	
- Speed regulation	: 0,5% of rated speed
- Speed variation	: 1:100
Vector control with Encoder	
- Speed regulation	: 0,1% of nominal speed
- Speed variation	: Up to 0 rpm

### Analog Inputs

Quantity (standard)	: Only with plug-in
Levels	: Not applicable
Impedance for voltage input	: Not applicable
Impedance for current input	: Not applicable
Function	: Not applicable
Maximum allowed voltage	: Not applicable

### Digital inputs

Quantity (standard)	: Only with plug-in
Activation	: Not applicable
Maximum low level	: Not applicable
Minimum high level	: Not applicable
Input current	: Not applicable
Maximum input current	: Not applicable
Function	: Not applicable
Maximum allowed voltage	: Not applicable

### Analog outputs

Quantity (standard)	: Only with plug-in
Levels	: Not applicable
RL for voltage output	: Not applicable
RL for current output	: Not applicable
Function	: Not applicable

### Digital outputs

Quantity (standard)	: Only with plug-in
Maximum voltage	: Not applicable
Maximum current	: Not applicable
Function	: Not applicable

### Communication

- Modbus-RTU (with accessory: Any plug-in module)
- Modbus/TCP (with accessory CFW500-CEMB-TCP)
- Profibus DP (with accessory: CFW500-CPDP)
- Profibus DPV1 (with accessory: CFW500-CPDP)
- Profinet (with accessory CFW500-CEPN-IO)
- CANopen (with accessory: CFW500-CCAN)
- DeviceNet (with accessory: CFW500-CCAN)
- EtherNet/IP (with accessory CFW500-CETH-IP)
- EtherCAT (Not available)
- BACnet (CFW500 G2 / CFW501 G2 / MW500 G2 with accessory: Any plug-in module)

### Available protection

- Output phase-phase overcurrent/Short
- Overcurrent/Short circuit phase-ground
- Under/Overvoltage in power
- Heat sink overtemperature
- Motor overload
- IGBT's modules overload
- Fault/External alarm
- Programming error

### Operation interface (HMI)

Availability	: Included in the product
HMI installation	: Fixed HMI
Number of HMI buttons	: 9
Display	: Numeric LCD
Indication accuracy	: 5% of rated current

# DATASHEET

## Variable Speed Drives



### Operation interface (HMI)

Speed resolution	: 0,1 Hz
Standard HMI degree of protection	: IP20
HMI battery type	: Not applicable
HMI battery life expectancy	: Not applicable
Remote HMI type	: Accessory
Remote HMI frame	: Not applicable
Remote HMI degree of protection	: IP54

### Ambient conditions

Enclosure	: IP20
Pollution degree	: 2 (EN50178 and UL508C)
Temperature around the inverter: of -10 °C / 14 °F to 40 °C / 104 °F. For temperatures above the specified is necessary to apply current reduction of 1 % per °C of 40 (104) to 50 °C (122 °F).	
Relative humidity: 5% to 95% without condensation.	
Altitude: up to 1000 m (3281 ft) under normal conditions. Of 1000 m (3281 ft) to 4000 m (13123 ft) reduce the current in 1% for each 100 m above (0,3% for each 100 ft above) of 1000 m (3281 ft). Reduce the maximum voltage (240 V for models 200...240 V, 480 V for models 380...480 V and 600 V for models 500...600 V) in 1,1% for each 100 m above (0,33% for each 100 ft above) of 2000 m.	

### Sustainability policies

RoHS	: Yes
Conformal Coating	: 3C2 (IEC 60721-3-3:2002)

### Dimensions and weight

- Size	: F
- Height	: 550 mm / 21.7 in
- Width	: 300 mm / 11.8 in
- Depth	: 254 mm / 10.0 in
- Weight	: 26 kg / 57.3 lb

### Mechanical Installation

Mounting position	: Surface or flange
Fixing screw	: M8
Tightening torque	: 19 N.m / 14.01 lb.ft
Allows side-by-side assembly	: No
Minimum spacing around the inverter:	
- Top	: 110 mm / 4.33 in
- Bottom	: 130 mm / 5.12 in
- Front	: 10 mm / 0.39 in
- Between inverters (IP20)	: 30 mm / 1.18 in

### Electrical connections

Cable gauges and tightening torques:

	Recommended cable gauge	Recommended tightening torque
Power	25.0 mm <sup>2</sup> (3 AWG)	5.5 N.m / 4.06 lb.ft
Braking	10.0 mm <sup>2</sup> (6 AWG)	5.5 N.m / 4.06 lb.ft
Grounding	16.0 mm <sup>2</sup> (4 AWG)	0.5 N.m / 0.37 lb.ft
Control	0.5 to 1.5 mm <sup>2</sup> (20 to 14 AWG)	0,5 N.m / 0.37 lb.ft

SoftPLC	: Yes, incorporated
Maximum breaking current	: 66.7 A
Minimum resistance for the brake resistor	: 12 Ω
Recommended aR fuse [6]	: FNH00-100K-A
Recommended circuit breaker [6]	: DWB160N-100-3DX
Disconnect switch	: Not applicable
Motor coupling box	: Not applicable

### Standards

Safety	<ul style="list-style-type: none"> <li>- UL 508C - Power conversion equipment.</li> <li>- UL 840 - Insulation coordination including clearances and creepage distances for electrical equipment.</li> <li>- EN 61800-5-1 - Safety requirements electrical, thermal and energy.</li> <li>- EN 50178 - Electronic equipment for use in power installations.</li> <li>- EN 60204-1-Safety of machinery. Electrical equipment of machines. Part 1: General requirements. Note: To have a machine in accordance with that standard, the manufacturer of the machine is responsible for the installation of an emergency-stop device and a network switching equipment.</li> <li>- EN 60146 (IEC 146) - Semiconductor converters.</li> <li>- EN 61800-2 - Adjustable speed electrical power drive systems - Part 2: General requirements - Rating specifications for low voltage adjustable frequency AC power drive systems.</li> </ul>
Electromagnetic Compatibility	<ul style="list-style-type: none"> <li>- EN 61800-3 - Adjustable speed electrical power drive systems - Part 3: EMC product standard including specific test methods.</li> <li>- EN 55011 - Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.</li> </ul>

# DATASHEET

## Variable Speed Drives



### Standards


	<ul style="list-style-type: none"> <li>- CISPR 11 - Industrial, scientific and medical (ISM) radio-frequency equipment</li> <li>- Electromagnetic disturbance characteristics - Limits and methods of measurement.</li> <li>- EN 61000-4-2 - Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 2: Electrostatic discharge immunity test.</li> <li>- EN 61000-4-3 - Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 3: Radiated, radio-frequency, electromagnetic field immunity test.</li> <li>- EN 61000-4-4 - Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 4: Electrical fast transient/burst immunity test.</li> <li>- EN 61000-4-5 - Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 5: Surge immunity test.</li> <li>- EN 61000-4-6 - Electromagnetic compatibility (EMC)- Part 4: Testing and measurement techniques - Section 6: Immunity to conducted disturbances, induced by radio-frequency fields.</li> </ul>
Mechanical Construction	<ul style="list-style-type: none"> <li>- EN 60529 - degrees of protection provided by enclosures (IP code).</li> <li>- UL 50 - enclosures for electrical equipment.</li> <li>- IEC 60721-3-3 - classification of environmental conditions - part 3: classification of groups of environmental parameters and their severities - section 3: stationary use at weather protected locations level 3m4.</li> </ul>

### Certifications

UL, CE, RCM, CS/IRAM, EAC, UKCA and RoHS  
CHINA

### Notes

- 1) Motor power is orientative, valid for standard WEG Motors of IV poles. The correct sizing must be done according to the nominal current of the motor used, which must be less than or equal to the rated output current of the inverter;
- 2) Braking resistor is not included;
- 3) Considering minimum line impedance of 1%;
- 4) For more information, refer to the user manual of CFW500 G2;
- 5) All images are merely illustrative.
- 6) For operation with switching frequency above nominal, apply derating to the output current (refer to the user manual).

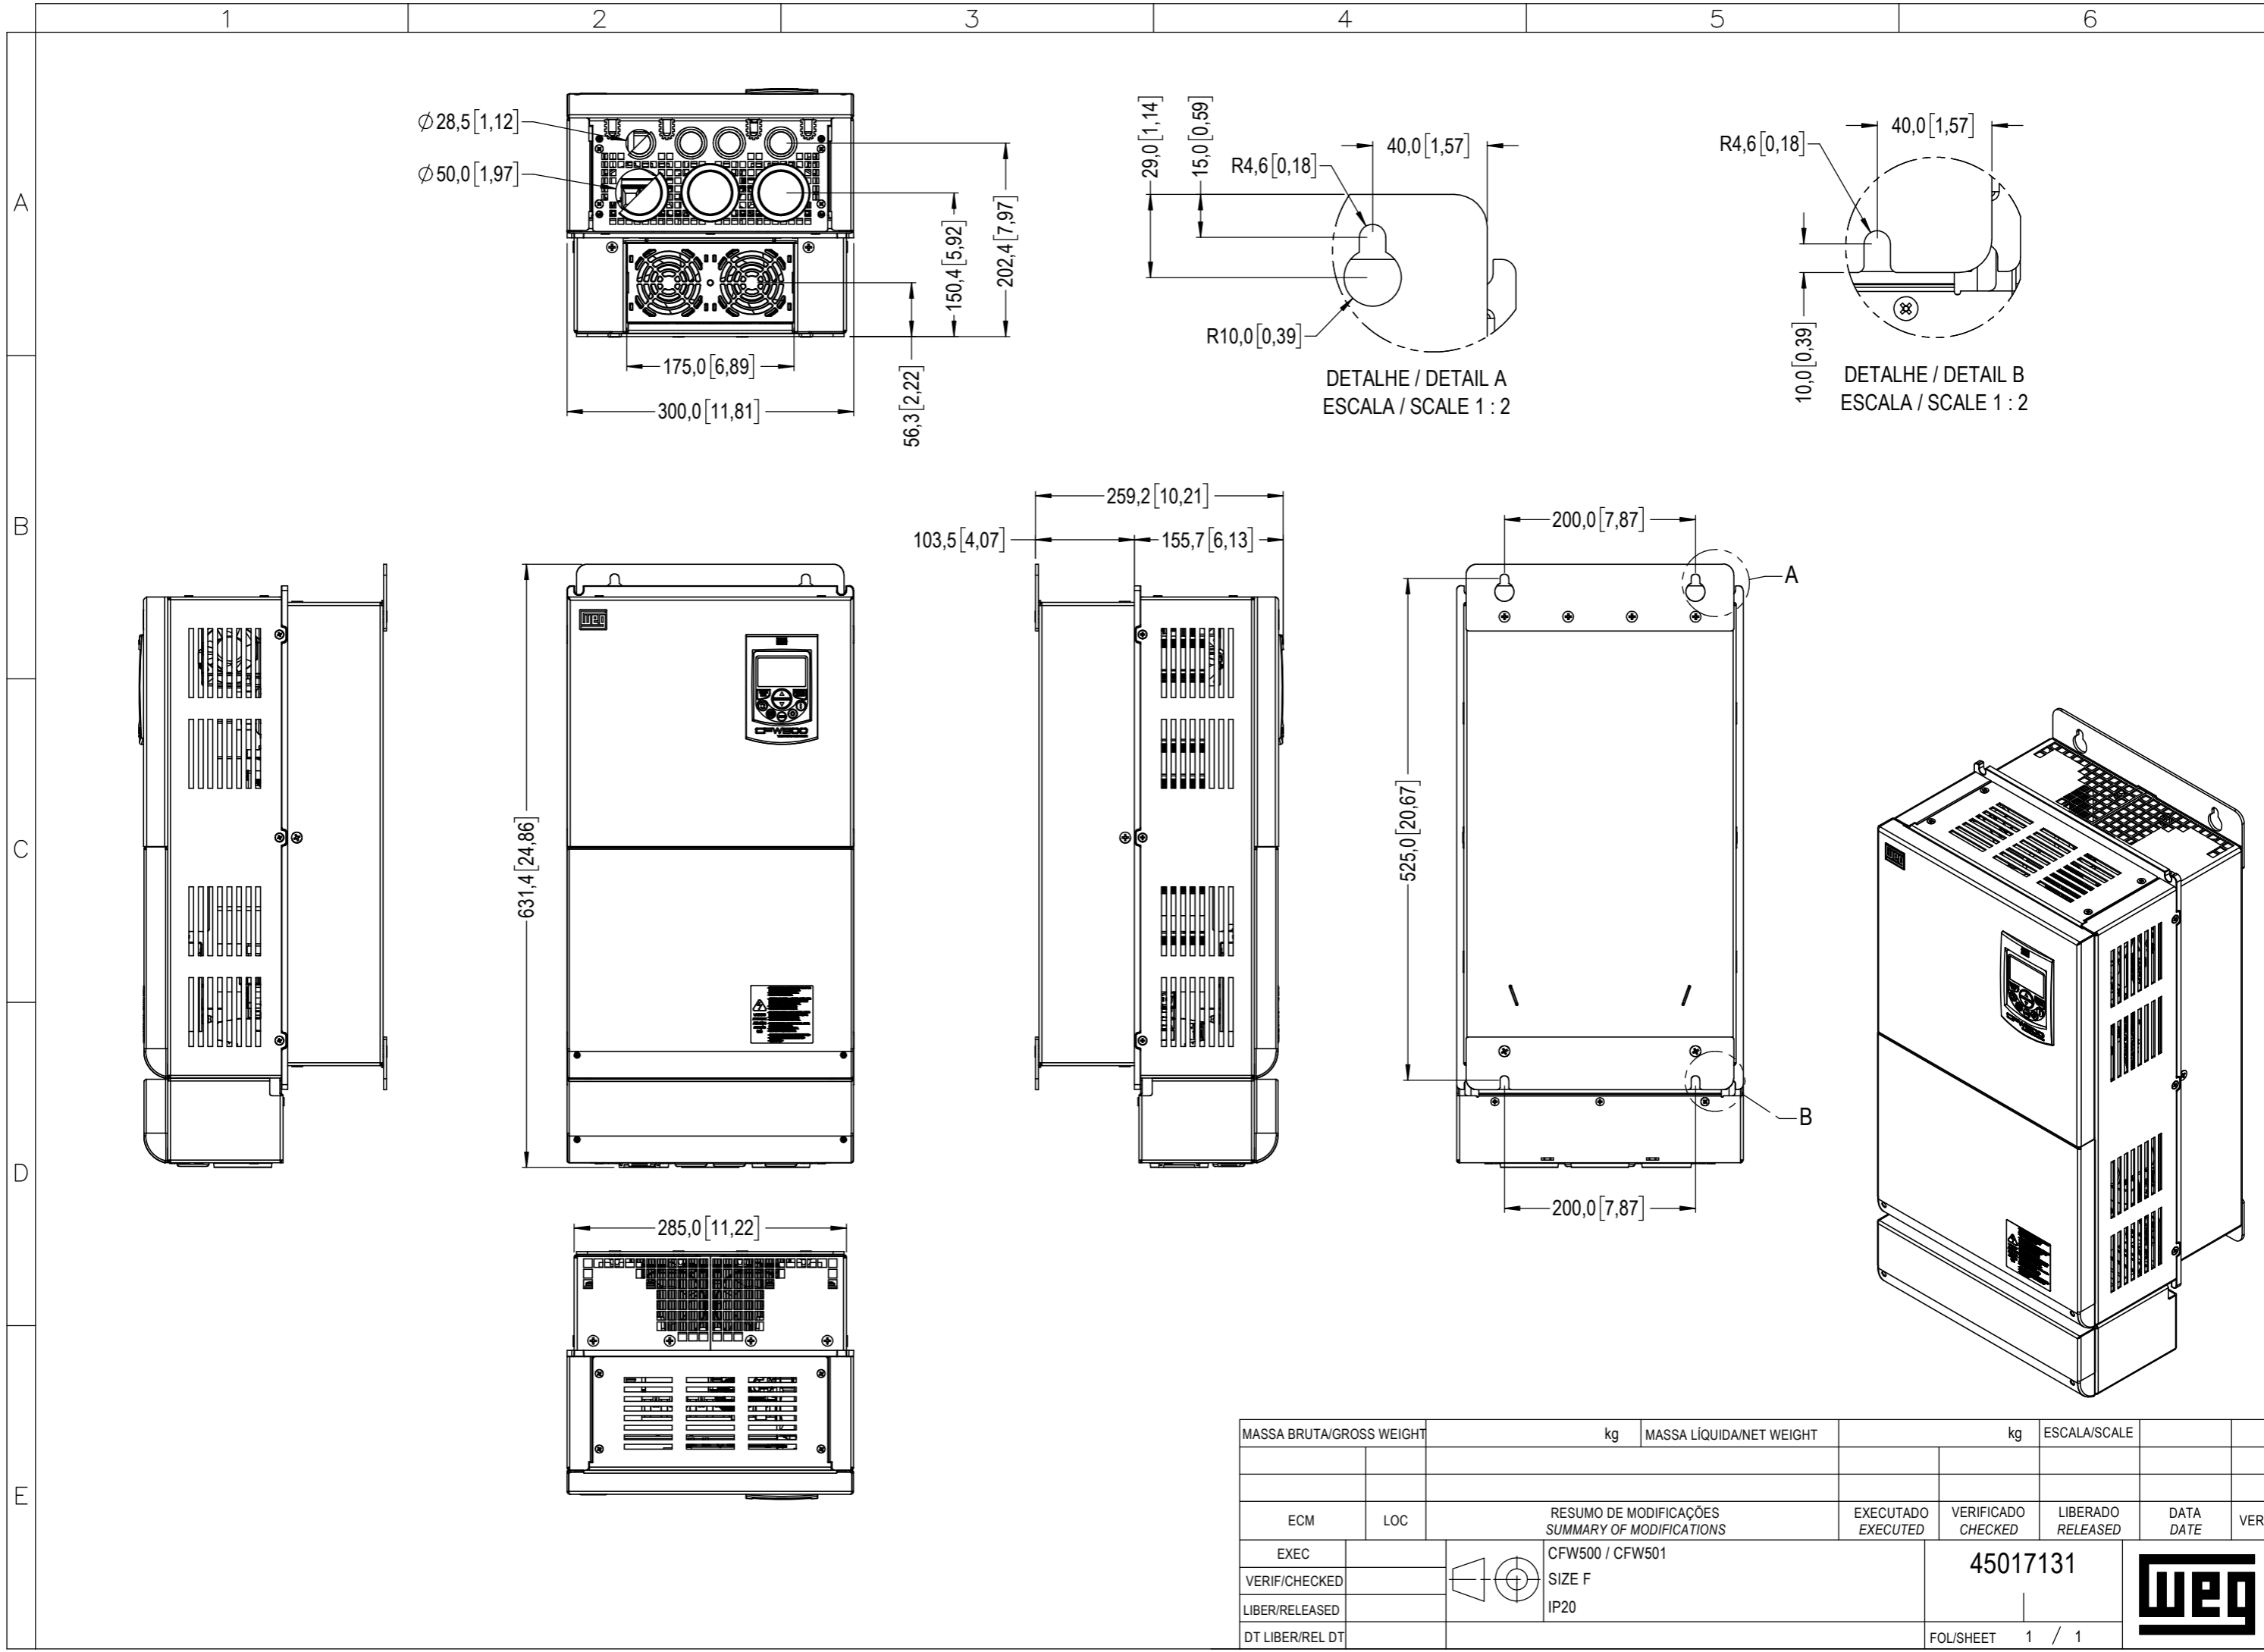

MASSA BRUTA/GROSS WEIGHT		kg	MASSA LÍQUIDA/NET WEIGHT		kg	ESCALA/SCALE			
ECM	LOC	RESUMO DE MODIFICAÇÕES SUMMARY OF MODIFICATIONS			EXECUTADO EXECUTED	VERIFICADO CHECKED	LIBERADO RELEASED	DATA DATE	VER
EXEC		CFW500 / CFW501			45017131				
VERIF/CHECKED		SIZE F							
LIBER/RELEASED		IP20							
DT LIBER/REL DT							FOL/SHEET 1 / 1		