




**SERIES TOP-TER  
SOCKET OUTLET**  
**CODE 509336**

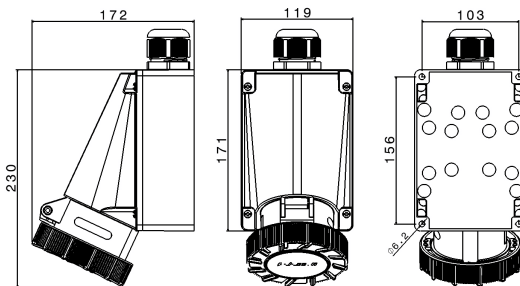

## Datasheet

### Electrical characteristics

Rated current	63A
Supply Voltage	400V 50/60Hz ●
Poles	3P+ $\perp$
Clock Position	6h
Rated insulation voltage	690 V
Signal plug inserted	1 contact pilot

### Reference Standards and Directives

Certification and approval marks	NYCE COLOMBIA, CE, UKCA
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)
Reference Standards	EN 60309-1:1999, EN 60309-1:1999/A1:2007, EN 60309-1:1999/A1AC:2014, EN 60309-1:1999/A2:2012, EN 60309-2:1999, EN 60309-2:1999/A1:2007, EN 60309-2:1999/A2:2012, EN IEC 63000:2018

### Mechanical characteristics

Manufacturing material	Technopolymer Recyclable Palazzoli
Alveolus/plugs treatment	Nickel plated
Color	Grey RAL 7042
Tightening diameter	24÷28 mm
Execution	Wall mounting
IP Protection degree	IP67
Additional IPdegree protection	-
Shock resistance	IK08 according to IEC/EN 62262
Resistance to Glow wire	650°C (Box), 850°C (Socket)
Flame rating according UL94	V-2 (Socket), HB (Box)
Terminals type	Screw - indirect clamping
Conductors section	Min: 4 mm <sup>2</sup> ;Max: 25 mm <sup>2</sup>
Terminal tightening torque	2,5 Nm
Net Weight	1.001 KG
Working Environment Temp.	Min: -25°C ;Max: +50°C
Warehousing Temperature	Min: -30°C ;Max: +70°C

The images are purely indicative. Palazzoli reserves the right to make changes without notice.