

PRODUCT DATA SHEET



CONTACTORS
Voltage Selection Chart
LC1D2510-XX


LC1D2510	110/120VAC
B6	24VAC
B7	24VAC
E7	48VAC
G6	110/120VAC
G7	110/120VAC
LE7	208V AC
M6	220V AC
M7	220V AC
P7	230VAC
Q6	380VAC
Q7	380VAC
R7	440VAC
T6	480VAC
U6	240VAC
U7	240VAC
V7	400VAC


<u>PART NUMBER – LC1D2510</u>: Aftermarket direct replacement contactors for Telemecanique LC1D2510, TeSys D Series, type LC1D, 3P, 3PH, 50A, 600V, voltage max 20 hp, 1 N/O auxiliary contact, AC magnetic contactor, suitable for use with LC1-D series motor control systems.

PRODUCT SPECIFICATIONS


Manufacturer	GLORY	
Sub-Category	Contactors	
Family	TeSys D	
Туре	LC1D	
Phase	3	
Poles	3	
Voltage	600	
Amperage	40	
Coil Voltage Max	20 (HP)	


REVISIONS						
ZONE	DESCRIPTION	REV.	DATE	APPROVED		

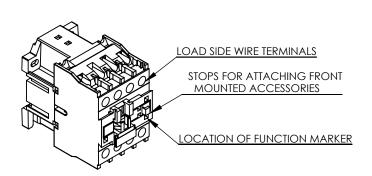









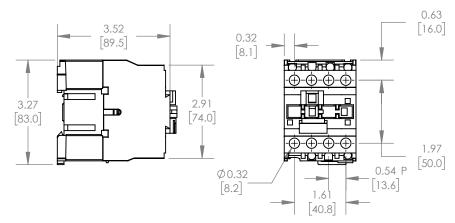



*NOTE: BRAH ELECTRIC CONTACTOR LC1D3210 IS AN AFTERMARKET DIRECT REPLACEMENT FOR LC1D2510,SERIES.SUITABLE FOR USE WITH LC1-DSERIES MOTOR CONTROL SYSTEMS.



PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BRAH ELECTRIC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BRAH ELECTRIC IS PROHIBITED.

UNLESS OTHERWISE NOTED

ALL DIMENSIONS ARE IN INCHES METRIC UNITS ARE DISPLAYED BENEATH IN [MM.]

MATERIAL

MOLDED PLASTIC CASE

N/A

DO NOT SCALE DRAWING

MAGNETIC CONTACTOR

SIZE A	DWG. I	LC1D 25 10		AREV.
SCAL	E:1:3	WEIGHT: 3.2 LBS	SHEET 1 OF 1	